


# Octo Water Treatment

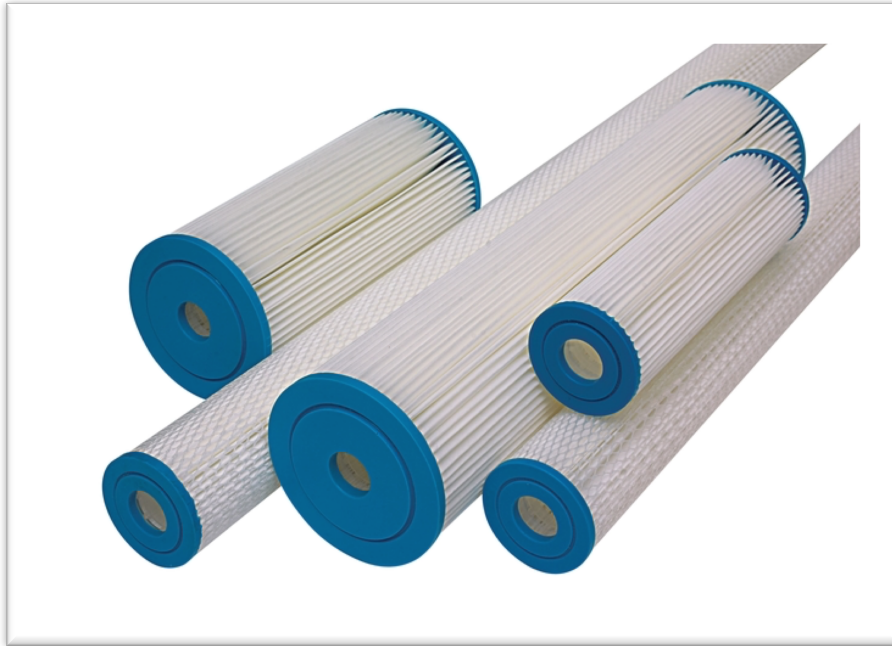

## Pleated Filter Cartridge

Octo Water Treatment Pleated cartridges are manufactured from food grade polyester filter material.

Providing a higher wet strength than regular cellulose cartridges. It also provides high flow rates and dirt-holding capacity, while maintaining extremely low pressure drop. (< 100mbars @ 18L/min for 9 3/4" 5μ)

The media is pleated around a polypropylene core for added strength and the ends are immersed in a thermo-setting vinyl plastisol. Embedding and sealing each end of the pleat in this manner fuses the components together forming an integrated endcap and gasket.

- Maximum temperature 50°C

Available in 9 3/4" x 2 1/2" and 9 3/4" x 4 1/2" filtration depths from 1μ to 50μ.

Order Codes			
<b>Standard 2 1/2" Diameter Cartridges</b>			
PL= Pleated	Length 9= 9 3/4"	Micron= 5μ	
PL	9	05	
PL	20	25	= Pleated 20" x 2 1/2" 25μ
<b>4 1/2" Diameter Cartridges</b>			
PL= Pleated	BB= Width 4 1/2"	Length 20= 20"	Micron= 5μ
PL	BB	20	05
PL	BB	09	50 = Pleated 9 3/4" x 4 1/2" 50μ

**Caution: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.**



Octo Marine SAS  
 10 Cite Artisanale de Valbonne, 108 Chemin de Saint Helene,  
 Valbonne, 06560, France  
 Email- [info@octomarine.net](mailto:info@octomarine.net) - Web- <http://www.octomarine.net>

